

TANKLESS WATER HEATER ISOLATION
KIT 3/4” NPT THREADED WITH RELIEF



TECHNICAL DATA

DESCRIPTION:
Tankless Water Heater Isolation Kit 3/4” NPT Threaded with Relief

SPECIFICATION:
Maximum working pressure: 125 PSI
Maximum working temperature: 250 °F
NPT thread ends comply with ANSI B1.20.1
Size: 3/4” NPT * 3/4” NH
Full port main flow channel
Easy identification of hot & cold valves
Large drain port outlet
Compact design makes valve easily for installation



CODE APPROVALS:
CUPC, NSF/ANSI 61, NSF/ANSI 372, CSA Listed



PART#	DESCRIPTION	FINISH
TWHV	Tankless Water Heater Isolation Kit 3/4” NPT threaded with Relief	Forged



Country of origin: China

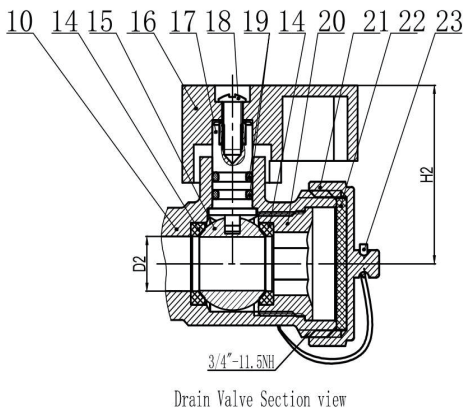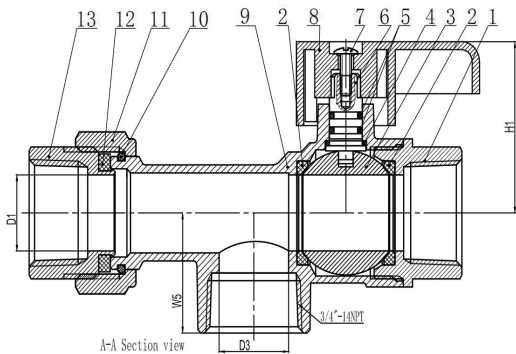

ROUGH IN DRAWING

23	CHAIN	1	PVC
22	RUBBER WASHER (2#)	1	EPDM
21	CAP NUT (2#)	1	BRASS
20	CAP (3#)	1	LEAD FREE BRASS
19	O-RING (2#)	2	EPDM
18	SCREW (2#)	1	PLATED STEEL
17	STEM (2#)	1	BRASS
16	HANDLE (2#)	1	AL-ALLOY
15	BALL (2#)	1	STAINLESS STEEL
14	SEAT (2#)	2	PTFE
13	CAP (2#)	1	LEAD FREE BRASS
12	RUBBER WASHER (1#)	1	EPDM
11	CAP NUT (1#)	1	BRASS
10	SNAP SPRING	1	STAINLESS STEEL
9	BODY (Hot)	1	LEAD FREE BRASS
8	HANDLE (1#)	1	AL-ALLOY
7	SCREW (1#)	1	PLATED STEEL
6	STEM (1#)	1	BRASS
5	O-RING (1#)	2	EPDM
4	GASKET	1	PTFE
3	BALL (1#)	1	STAINLESS STEEL
2	SEAT (1#)	2	PTFE
1	CAP (1#)	1	LEAD FREE BRASS
NO.	ITEM	TOTAL	MATERIAL

ALL DIMENSIONS SHOWN ARE NOMINAL

Meets requirements for CUPC, NSF/ANSI 61, NSF/ANSI 372, CSA