

DIELECTRIC UNION



TECHNICAL DATA


- DESCRIPTION:**
- Prevents electrolysis or galvanic action when connecting dissimilar materials
 - Use for FIP GALV x Brass pipe ends
 - Max. temperature rating:180°F
 - Max. pressure rating:250PSI
 - Meets ANSI/NSF 61-2013 requirements
 - CUPC&NSF/ANSI61 Certified
 - Threaded connections comply with ASME B1.20.1/ASTM F1498
 - Copper connections comply with ASME B16.18/ASME B16.22.

PART#	DESCRIPTION
DU-SWTXFIP-114	1-1/4" SWT X 1-1/4" FIP DIELECTRIC UNION



Country of origin: China

ROUGH IN DRAWING

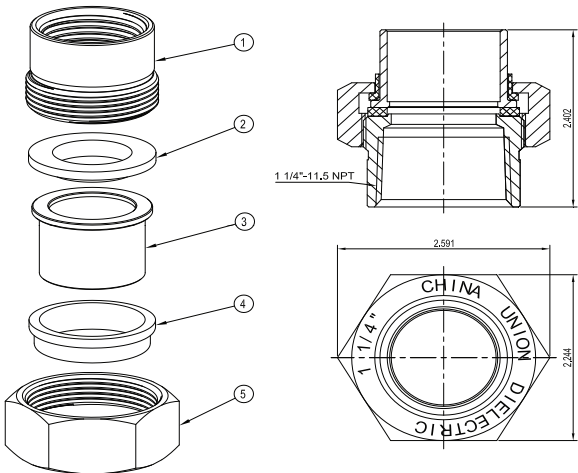

MATERIAL SPECIFICATION		
PART	MATERIAL	SPECIFICATION
1	Male Body	Steel(Galvanized coat) Q235
2	Washer	EPDM
3	Adapter	Brass UNS C46500
4	Insulator Sleeve	PSU
5	Nut	Steel(Galvanized coat) Q235

ALL DIMENSIONS SHOWN ARE NOMINAL