

F1960 LAVATORY SUPPLY WITH INTEGRATED ANGLE STOP BRAIDED STEEL



Peace of Mind for the Professional Plumber

TECHNICAL DATA

DESCRIPTION: F1960 Lavatory Supply With Integrated Angle Stop Braided Steel 20"

CONSTRUCTION: Brass Angle Stop - PTFE Sealing Ring - Brass Ball - Rubber O-Ring - Steel Ferrule - PVC Hose - Stainless Steel Braided - Brass Hex Nut - Brass Barb - Rubber Washer

FLOW RATE: 2500PSI Max. Burst Pressure
180°F Max Working Temp.


CODE APPROVALS:

UPC approval - meets NSF-61 standards



PART#	DESCRIPTION	FINISH
LSAS-BS- EXP-20	F1960 Lavatory Supply with Integrated Angle Stop Braided Steel 20"	Stainless

ROUGH IN DRAWING

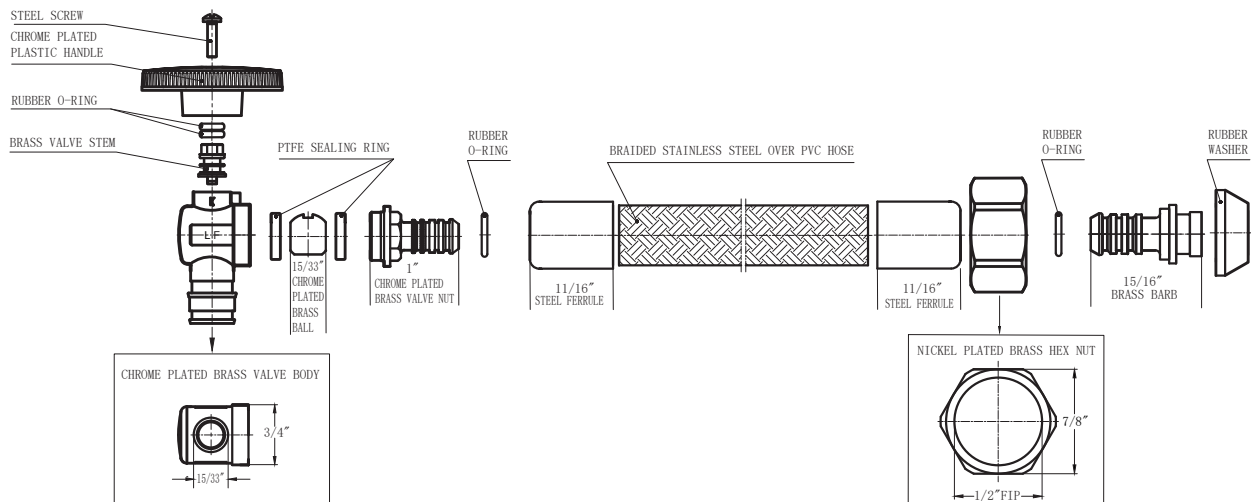

ALL DIMENSIONS SHOWN ARE NOMINAL