

1/2” PRESS FULL PORT BALL VALVE



TECHNICAL DATA

DESCRIPTION:
1/2” Press Full Port Ball Valve

CONSTRUCTION:
Lead Free Brass Body and Brass Stem, A3 Handle, Steel Gasket and Nut, PTFE Seal

FEATURE:
600 WOG, 150 WSP
Temperature range: -20°F - 300 °F
Press ends comply with ANSI B16.51
Designed for residential use with water, oil or gas


CODE APPROVALS:
CSA Listed. Complies w/ NSF-61, NSF-372

PART#	DESCRIPTION	FINISH
BV-PRS-12	1/2” Press Full Port Ball Valve	Forged



Country of origin: China

ROUGH IN DRAWING

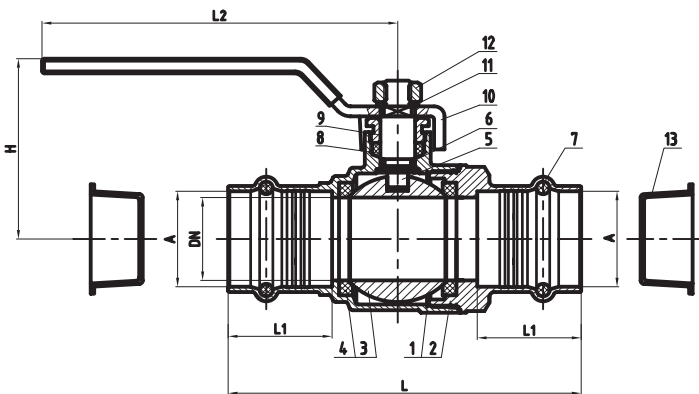

Unit:mm						
Size	A	DN	L	L1	L2	H
1/2"	Φ16.1	Φ14.5	83	28	90	50

13	Plastic Jacket	Nylon	2	Surface Plain
12	Nut	Steel	1	Surface Plain
11	Gasket	Steel	1	Surface Plain
10	Handle	A3	1	Chrome
9	Pressed Cap	C37710	1	Surface Plain
8	Liner	PTFE	1	Surface Plain
7	O-ring	EPDM	2	Surface Plain
6	O-ring	EPDM	1	Surface Plain
5	Stem	C46500	1	Surface Plain
4	Seals	PTFE	2	Surface Plain
3	Valve Ball	C46500	1	Surface Plain
2	Bonnet	C46500	1	Nicked
1	Body	C46500	1	Nicked
No.	Item	Material	Qty	Notes

ALL DIMENSIONS SHOWN ARE NOMINAL

Meets requirements for NSF-61, NSF-372