

2" PRESS FULL PORT BALL VALVE



TECHNICAL DATA

DESCRIPTION:

2" Press Full Port Ball Valve

CONSTRUCTION:

Lead Free Brass Body and Brass Stem, A3 Handle, Steel Gasket and Nut, PTFE Seal

FEATURE:

600 WOG, 150 WSP

Temperature range: -20°F - 300 °F

Press ends comply with ANSI B16.51

Designed for residential use with water, oil or gas

CODE APPROVALS:

CSA Listed. Complies w/ NSF-61, NSF-372


PART#
BV-PRS-2

DESCRIPTION
2" Press Full Port
Ball Valve

FINISH
Forged

Country of origin: China

ROUGH IN DRAWING

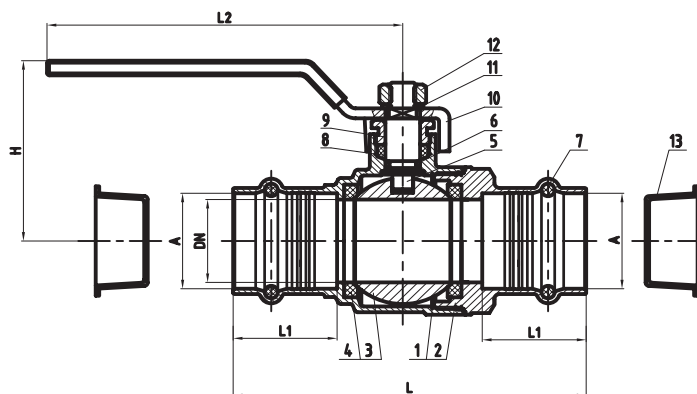

Unit:mm

Size	A	DN	L	L1	L2	H
2"	Φ54.2	Φ49	153	40	165	88

No.	Item	Material	Qty	Notes
13	Plastic Jacket	Nylon	2	Surface Plain
12	Nut	Steel	1	Surface Plain
11	Gasket	Steel	1	Surface Plain
10	Handle	A3	1	Chrome
9	Pressed Cap	C37710	1	Surface Plain
8	Liner	PTFE	1	Surface Plain
7	O-ring	EPDM	2	Surface Plain
6	O-ring	EPDM	1	Surface Plain
5	Stem	C46500	1	Surface Plain
4	Seals	PTFE	2	Surface Plain
3	Valve Ball	C46500	1	Surface Plain
2	Bonnet	C46500	1	Nicked
1	Body	C46500	1	Nicked

ALL DIMENSIONS SHOWN ARE NOMINAL

Meets requirements for NSF-61, NSF-372