

3" PRESS FULL PORT BALL VALVE



TECHNICAL DATA

DESCRIPTION:
3" Press Full Port Ball Valve

CONSTRUCTION:
Lead Free Body, Bonnet, Valve Ball and Stem, A3 Handle, Steel Gasket and Nut, EPDM O-Ring, PTFE Seal

FEATURE:
600 WOG, 150 WSP
Temperature range: -20°F - 300 °F
Press ends comply with ANSI B16.51
Designed for residential use with water, oil or gas


CODE APPROVALS:
CSA Listed. Complies w/ NSF-61, NSF-372

PART#	DESCRIPTION	FINISH
BV-PRS-3	3" Press Full Port Ball Valve	Forged



Country of origin: China

ROUGH IN DRAWING

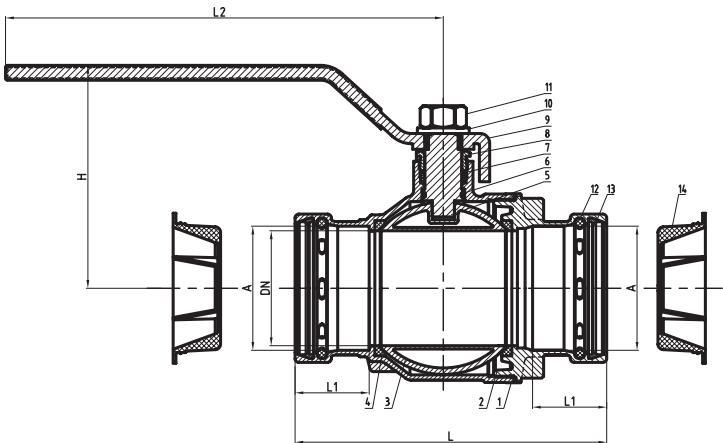

Unit:mm						
Size	A	DN	L	L1	L2	H
3"	Φ79.7	Φ75	190	45	241	130

14	Plastic Jacket	Nylon	2	Surface Plain
13	Copper Ring	H62	2	Surface Plain
12	O-ring	EPDM	2	Surface Plain
11	Nut	Steel	1	Surface Plain
10	Gasket	Steel	1	Chrome
9	Handle	A3	1	Chrome
8	Pressed Cap	C37710	1	Surface Plain
7	Liner	PTFE	1	Surface Plain
6	O-ring	EPDM	1	Surface Plain
5	Stem	C46500	1	Surface Plain
4	Seals	PTFE	2	Surface Plain
3	Valve Ball	C46500	1	Chrome
2	Bonnet	C46500	1	Surface Plain
1	Body	C46500	1	Surface Plain
No.	Item	Material	Qty	Notes

ALL DIMENSIONS SHOWN ARE NOMINAL

Meets requirements for NSF-61, NSF-372