

Specification

CPVC Transition Adapter

Features

Made of FlowGuard Gold® CPVC with stainless steel design

Large hex nuts for easy installation

Pressure rated to 100 PSI @ 180 °F

Meets compliance ASTM D2846, ANSI B1.20.1

Material complies with NSF61

Certified to NSF372

IAMPO/NSF Listed






MNPT x CPVC



FNPT x CPVC



Drop ear elbow

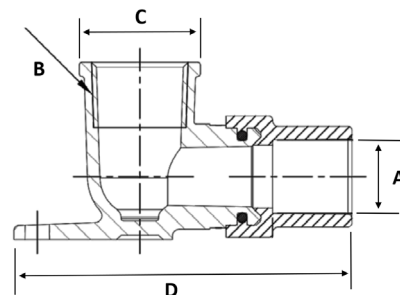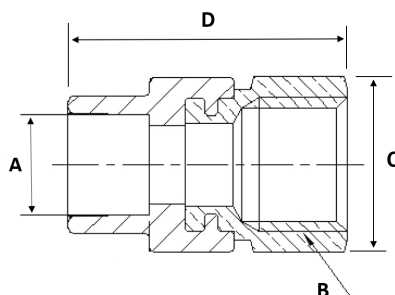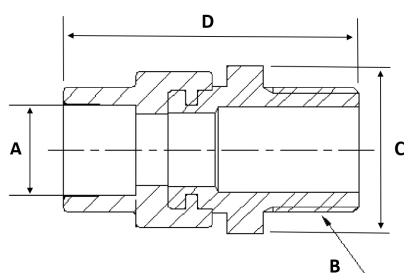

Unit: inches

Model#	Description	A	B	C	D
FA-CPVC-SS-12	1/2" CPVC CTS X 1/2" FIP Stainless Steel Transition Adapter	0.62	1/2"-14 NPT	0.94	1.73
FA-CPVC-SS-34	3/4" CPVC CTS X 3/4" FIP Stainless Steel Transition Adapter	0.87	3/4"-14 NPT	1.19	1.85
FA-CPVC-SS-1	1" CPVC CTS X 1" FIP Stainless Steel Transition Adapter	1.12	1"-11.5 NPT	1.49	2.23
FA-CPVC-SS-114	1-1/4" CPVC CTS X 1-1/4" FIP Stainless Steel Transition Adapter	1.37	1 1/4"-11.5 NPT	1.96	2.92
FA-CPVC-SS-112	1-1/2" CPVC CTS X 1-1/2" FIP Stainless Steel Transition Adapter	1.62	1 1/2"-11.5 NPT	2.21	3.17
FA-CPVC-SS-2	2" CPVC CTS X 2" FIP Stainless Steel Transition Adapter	2.12	2"-11.5 NPT	2.73	3.76
MA-CPVC-SS-12	1/2" CPVC CTS X 1/2" MIP Stainless Steel Transition Adapter	0.62	1/2"-14 NPT	0.97	1.97
MA-CPVC-SS-34	3/4" CPVC CTS X 3/4" MIP Stainless Steel Transition Adapter	0.87	3/4"-14 NPT	1.24	2.12
MA-CPVC-SS-1	1" CPVC CTS X 1" MIP Stainless Steel Transition Adapter	1.12	1"-11.5 NPT	1.35	2.60
MA-CPVC-SS-114	1-1/4" CPVC CTS X 1-1/4" MIP Stainless Steel Transition Adapter	1.37	1 1/4"-11.5 NPT	1.74	3.12
MA-CPVC-SS-112	1-1/2" CPVC CTS X 1-1/2" MIP Stainless Steel Transition Adapter	1.62	1 1/2"-11.5 NPT	1.98	3.32
MA-CPVC-SS-2	2" CPVC CTS X 2" MIP Stainless Steel Transition Adapter	2.12	2"-11.5 NPT	2.46	4.08
DE-CPVC-SS-12	1/2" CPVC CTS X 1/2" FIP Drop Ear Elbow Stainless Steel Transition Adapter	0.62	1/2"-14 NPT	1.02	2.86

